


STEMWALL CONSTRUCTION


MAXIMUM 12' ABOVE NATURAL GRADE OR CROWN OF ADJACENT ROAD, WHICHEVER IS HIGHER. SLOPE NOT TO EXCEED 8:1.

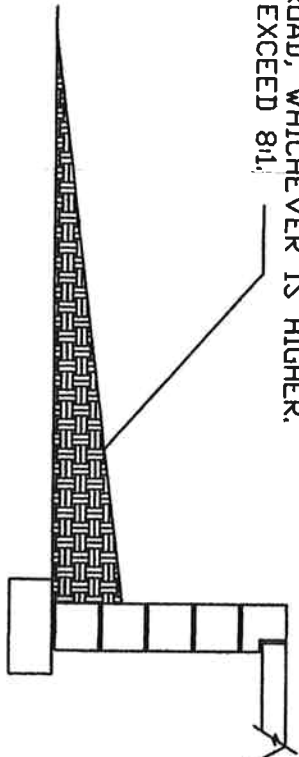

HABITABLE FLOOR LEVEL MUST BE MINIMUM 18 INCHES ABOVE THE CROWN OF THE ADJACENT ROAD & MUST MEET MINIMUM BASE FLOOD ELEVATION PER FEMA MAPS, MAY 5, 2003. (NOTE: RECESSED SHOWERS ARE CONSIDERED HABITABLE SPACE).

DEEPEND FOOTER

MAXIMUM 12' ABOVE NATURAL GRADE OR CROWN OF ADJACENT ROAD, WHICHEVER IS HIGHER. SLOPE NOT TO EXCEED 8:1.

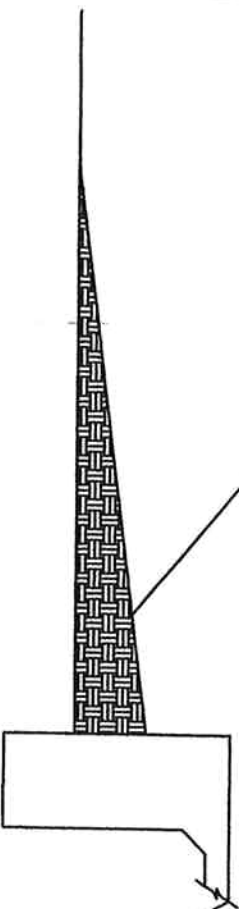

HABITABLE FLOOR LEVEL MUST BE MINIMUM 18 INCHES ABOVE THE CROWN OF THE ADJACENT ROAD & MUST MEET MINIMUM BASE FLOOD ELEVATION PER FEMA MAPS, MAY 5, 2003. (NOTE: RECESSED SHOWERS ARE CONSIDERED HABITABLE SPACE).